

LBT24GSP-M-SFP

4-port 10//100/1000BASE-TX+2G SFP Managed Industrial Switch



Slim Type with more Practicability and Convenience

LBT24GS-M-SFP an hardened 6-port Industrial Ethernet Switch, provides non-blocking wire-speed performance in harsh industrial environment. It also provides 4-port 10/100BASE-TX RJ45 +2G SFP delivered in an IP40 rugged, strong case with redundant power system. Its slim case is suitable for such applications as surveillance system deployments, control management and wireless service in climatically demanding environments with wide temperature range from -40° C to 80° C.

The **LBT24GS-M-SFP** provides the flexibility to all kinds of 10/1000Mbps Ethernet Media on RJ-45 port and performs highly stable fiber performance.

The **LBT24GS-M-SFP** is packaged in a compact IP40 case that allows either DIN rail or panel mounting to have efficient usage of cabinet space. It provides an integrated power supply with a wide range of voltages for worldwide operation. It also offers dual-redundant, reversible polarity 12V DC to 52V DC power supply inputs for high availability applications requiring dual or backup power inputs.

Interface

- 4-port 10/100Base-Tx RJ-45 with auto negotiation and auto-MDI/ MDI-X function
- 2-port gigabit SFP

Industrial conformance

- 12V to 52V DC, redundant power input
- -40°C to 80°C operating temperature
- IP40 aluminum housing
- Supports 6KV DC Ethernet ESD protection
- Supports 6KV DC EFT protection for power line
- Free Fall, Shock and Vibration Stability
- DIN-rail and wall-mountable hardware design

L2 management


- Support STP/RSTP/MSTP
- Web management, CLI
- IGMP snooping, QOS,VLAN,SNMP

Specifications:

Model No.	LBT24GS-M-SFP
1000Base-TX Port	4 port RJ-45 auto-MDI / MDI-X
1000Base-FX Port	2G SFP Slot
Performance Specification	Bandwidth (switch capacity): 38Gbps Packet Buffer Memory: 12Mbit Packet Forwarding Rate: 28.3Mpps MAC Address Table: 8K
Installation	DIN rail
Maximum Frame Size	10240bytes
Flow Control	Back pressure for half duplex, IEEE 802.3x pause frame for full duplex
Enclosure	IP40 slim type metal case
LED Indicator	Power: Red Fiber: Link 2(Green) Ethernet: Yellow
Power Input	12 to 52V DC redundant power
Power Consumption	3 watts
Surge Protection	± 4KV
Network Protocols	IEEE802.3 10BASE-T; IEEE802.3i 10Base-T; IEEE802.3u;100Base-TX/FX; IEEE802.3ab 1000Base-T; IEEE802.3z 1000Base-X; IEEE802.3x;
Network cables	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or later UTP(≤10meter) 1000BASE-TX: Cat6 or later UTP(≤100 meter)
	EN55022/CISPR22, Class A IEC61000-4-2 (ESD): ±8kV (contact), ±12kV (air)

Industry Standard	IEC61000-4-3 (RS): 10V/m (80~1000MHz) IEC61000-4-4 (EFT): Power Port: $\pm 4\text{kV}$; Data Port: $\pm 2\text{kV}$ IEC61000-4-5 (Surge): Power Port: $\pm 2\text{kV/DM}$, $\pm 4\text{kV/CM}$; Data Port: $\pm 2\text{kV}$ IEC61000-4-6 (CS): 3V (10kHz-150kHz); 10V (150kHz-80MHz) IEC61000-4-16 (Common mode conduction): 30V (cont.), 300V (1s)
Certificate	CE RoHS compliance
MTBF	>300,000hours
Dimensions (W x D x H)	143.7 x 103 x 44.2 mm
Weight	Product Weight: 0.36KG Packing Weight: 0.46KG
Working Environment	Working temperature: $-40\sim 80^{\circ}\text{C}$; Storage temperature: $-40\sim 80^{\circ}\text{C}$ Relative Humidity: 5%~95 % (no condensation)
Warranty	5-year warranty.

Dimensions

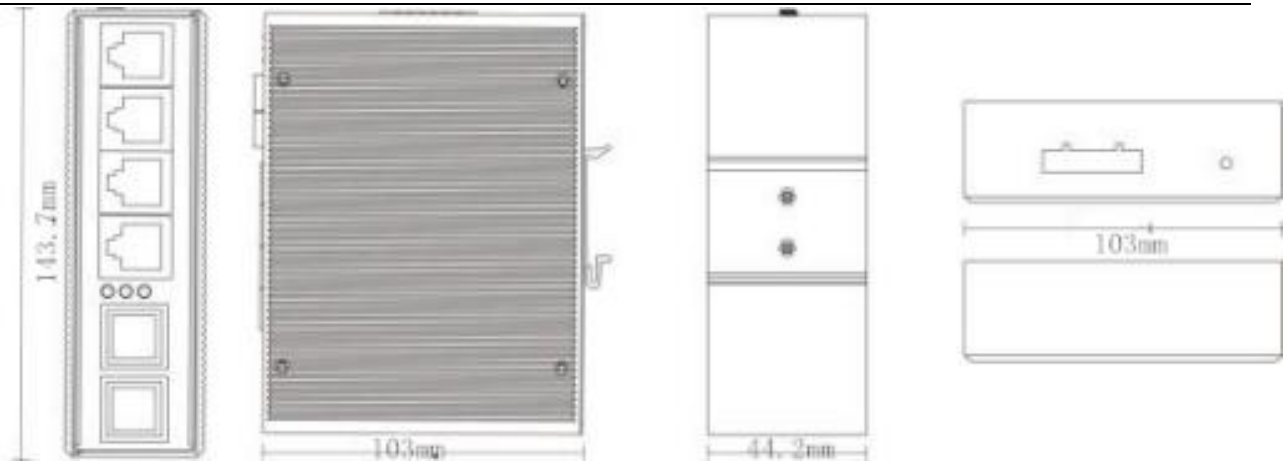

Ordering Information

LBT24GS-M-SFP	4-port 10/100/100BASE-TX+2G SFP Managed Industrial Switch
----------------------	---