

LBT48GS-M-SFP

8-port 10//100/1000BASE-TX+4G SFP Managed Industrial Switch



Slim Type with more Practicability and Convenience

LBT48GS-M-SFP is a hardened 12-port Industrial Ethernet Switch, provides non-blocking wire-speed performance in harsh industrial environment. It also provides 8-port 10/100/1000BASE-TX RJ45 +4G SFP delivered in an IP40 rugged, strong case with redundant power system. Its slim case is suitable for such applications as surveillance system deployments, control management and wireless service in climatically demanding environments with wide temperature range from -40° C to 80° C.

The **LBT48GS-M-SFP** provides the flexibility to all kinds of 10/1000Mbps Ethernet Media on RJ-45 port and performs highly stable fiber performance.

The **LBT48GS-M-SFP** is packaged in a compact IP40 case that allows either DIN rail or panel mounting to have efficient usage of cabinet space. It provides an integrated power supply with a wide range of voltages for worldwide operation. It also offers dual-redundant, reversible polarity 12V DC to 52V DC power supply inputs for high availability applications requiring dual or backup power inputs.

Interface

- 8-port 10/100/1000Base-Tx RJ-45 with auto negotiation and auto-MDI/ MDI-X function
- 4-port gigabit SFP

Industrial conformance

- 12V to 52V DC, redundant power input
- -40°C to 80°C operating temperature
- IP40 aluminum housing
- Supports 6KV DC Ethernet ESD protection
- Supports 6KV DC EFT protection for power line
- Free Fall, Shock and Vibration Stability
- DIN-rail and wall-mountable hardware design

L2 management


- Support STP/RSTP/MSTP/ERPS
- Web management, CLI
- IGMP snooping, QoS, VLAN
- SNMP v1/v2c/v3

Specifications:

Model No.	LBT48GS-M-SFP
1000Base-TX Port	8 port RJ-45 auto-MDI / MDI-X
1000Base-FX Port	4G SFP Slot
Performance Specification	Bandwidth: 56Gbps Packet Buffer Memory: 12Mbit Packet Forwarding Rate: 41.6Mpps MAC Address Table: 8K
Installation	DIN rail
Maximum Frame Size	10240bytes packet size
Flow Control	Back pressure for half duplex, IEEE 802.3x pause frame for full duplex
Enclosure	IP40 aluminum housing
LED Indicator	Power: Red Fiber: Link 2(Green) Ethernet: Yellow
Power Input	12 to 52V DC redundant power
Surge protection	± 4KV
Protection	ESD (Ethernet): 6KV DC Surge (Power): 6KV DC
Network Protocols	IEEE802.3 10BASE-T; IEEE802.3i 10Base-T; IEEE802.3u;100Base-TX/FX; IEEE802.3ab 1000Base-T; IEEE802.3z 1000Base-X; IEEE802.3x;
Network cables	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or later UTP(≤100meter) 1000BASE-TX: Cat6 or later UTP(≤100 meter)
	EN55022/CISPR22, Class A

Industry Standard	IEC61000-4-2 (ESD): $\pm 8\text{kV}$ (contact), $\pm 12\text{kV}$ (air) IEC61000-4-3 (RS): 10V/m (80~1000MHz) IEC61000-4-4 (EFT): Power Port: $\pm 4\text{kV}$; Data Port: $\pm 2\text{kV}$ IEC61000-4-5 (Surge): Power Port: $\pm 2\text{kV/DM}$, $\pm 4\text{kV/CM}$; Data Port: $\pm 2\text{kV}$ IEC61000-4-6 (CS): 3V (10kHz-150kHz); 10V (150kHz-80MHz) IEC61000-4-16 (Common mode conduction): 30V (cont.), 300V (1s)
Certification	CE RoHS compliance
MTBF	>300,000hours
Dimensions (W x D x H)	143×125×48mm
Weight	Product Weight: 1.25KG Packing Weight: 1.4KG
Working Environment	Working temperature: $-40\sim 80^{\circ}\text{C}$; Storage temperature: $-40\sim 80^{\circ}\text{C}$ Relative Humidity: 5%~95 % (no condensation)
Warranty	5-year warranty.

Dimensions

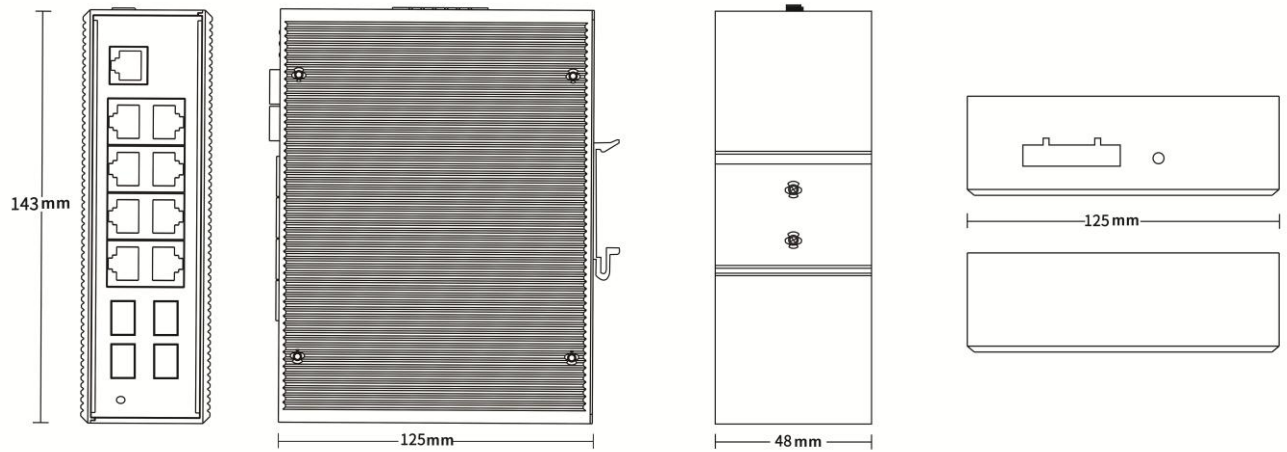

Ordering Information

LBT48GS-M-SFP	8-port 10/100/100BASE-TX+4G SFP Managed Industrial Switch
----------------------	---