



4G/5G Industrial Wireless Router

Model: **T300**

Version: 1800-CN-5GA-W6-S1-RS485&RS232

Product Introduction

The 4G industrial-grade wireless router is a high-performance wireless communication product developed by Shenzhen Libtor Technology Co., Ltd. based on the requirements of 4G/5G networks. It is mainly used for industrial users' data transmission services, supporting functions such as transparent data transmission, image transmission, device monitoring and wireless routing for Internet access.

4G industrial-grade wireless routers, with embedded high-performance cpus, effortlessly handle advanced applications such as routing and security, and can be paired with multiple 4G/5G industrial communication modules (TDD-LTE/FDD-LTE networks). It provides 10/100M Ethernet ports, WIFI wireless interfaces, and serial ports. Compatible with a variety of terminal devices. Supports WEB configuration for easy and simple management, and supports remote cloud control.

Countries	4G/5G network solutions	Wireless network	Number of slots	Serial port Protocol	Custom content
CN= China Version EU= European version NA= North American version GL= Global Edition SA= South American version JP= Japanese version AU= Australian version	A= Domestic Q= Qualcomm V=4G private network R=Redcap H= hisilicon	W0= No WiFi W4=WiFi4 W5=WiFi5 W6=WiFi6	S1= Single card S2= Dual cards	RS232 RS485 TTL	DO POE GPS ESIM
Example: 1800-CN-5GA-W6-S1-RS485&232; Version 1800, China 5G domestic solution, Dual band WiFi6, single card, protocol RS485&232, no customization Note: Some versions do not allow customization of the above content.					

○ Hardware parameters

Product size	149*126*46mm (Length×Width×Height) (excluding the fixed ear and antenna)
Power supply	DC power supply: 7-35V/3A, reverse polarity protection, surge protection
GPS	Customizable GNSS positioning module, supporting RTK technology, and capable of using a variety of satellite systems (GPS, GLONASS, Beidou, WAAS, EGNOS, MSAS, GAGAN) as a mixed engine.
External interface	Reset key: 1
Protection grade	Indicator lights: 6
	Antenna interface: 2-13 (optional)
	SIM card slot: 1
	Power: 4-pin 2.5mm industrial DC power socket, 2.1mm x 5.5mm center pin DC jack
	RS232 & RS485 interface: 1 (3.5mm 6-pin EDGK socket, supports standard RS485 and RS232 serial protocols)
	LAN ports: 5 (LAN1 is WAN/LAN adaptive), 3kV lightning protection (customizable), POE input (customizable)
	Protection rating: IP30
Indicator light	LINK, SYS, WAN/LAN1 to LAN2
Antenna	SMA external rotating inner hole
Storage memory	Storage :8MB, memory: 64MB
Authentication	CE, FCC
Power consumption (current)	4G: less than 400 mA 5G: less than 800mA
Operating temperature Humidity	Operating temperature: -20 to +70 ° C Storage temperature: -40 to +80 ° C Humidity: 5 to 95% (non-condensing)


○ Product packaging size/weight

Product weight (g)	1100g
Product dimensions (mm)	149*126*46mm
Packaging size (cm)	385*220*64cm
Product packaging weight (kg)	1kg
Outer box dimensions (cm)	71.3*44.3*26.8cm
Container weight estimate (kg)	22kg

○ Feature Data

Basic Features	Internet Protocol: 4G /5G dial-up DHCP/Static /PPPoE dial-up /WiFi relay	
	Number of supported users: Wired: 253, wireless: 128	
	WiFi Protocol: IEEE802.11b/g/n	
	Network functions: NAT, DNAT, DMZ, port forwarding,TCP/IP,ICMP	
VPN	Port protocols: MODBUS, MODBUS slave, MQTT gateway	
	OpenVPN Client、 IPsecVPN Client、 PPTP VPN Client、 L2TP VPN Client	
Operating frequency band	2412-2472MHz、 5180-5825Mhz	
WiFi transmission Rate/Data	Transmission Rate: 1800 Mbps (MAX)	
	Wi-Fi Data:	
	2.4G Speed: 573 Mbps (Max)	
	2.4G Power: 21 dB (-2 dBm+)	
Firmware customization	5.8G Speed: 1201 Mbps (Max)	
	5.8G Power: 21 dB (-2 dBm+)	
WLAN Security Consultative	Operating System: Linux operating system based on OpenWrt	
	Supported languages: BusyBOS sheel,Lua,C,C++	
	Development tools: Provide SDK packages with built-in environments and contact us for custom development based on requirements documentation	
System Services	OpenSystem, WPA-PSK, WPA2-PSK, WPAPSK/WPA2 PSK, WPA1 / WPA2	
	Virtual servers, port triggers, serial port services, firewalls, MAC filtering, access control, port blocking, regional Settings, factory reset, NTP server Settings, backup system information, software upgrades, remote management	
Operating system Browser Requirements	System :Windows XP/VISTA, Linux 2.6, Windows 7 ,	
	MAC OS: 1 0.3.7 ; Browser :IE:6.0 Safari:1.2.4	
	Firefox:2.0.0.8	
Device Management	WEB UI	HTTP/HTTPS, status, configuration, local firmware updates, troubleshooting, Syslog
	FOTA upgrades	Cloud platform server update
	SSH/TELNET	SSH(v1,v2), telnet
	TR-069	OpenACS, EasyCwm p, ACSLite, tGem, Libre ACS, Genie ACs, Free ACS, LibCWMP, Friendly tech(customizable)
	SNMP Network Management	SNMP(v1, v2, v3)(customizable)
	Remote Interface Protocol	API management based on HTTP/HTTPS (customizable)
	MODBUS	MODBUS TCP Status/Control (customizable)

○ Housing positioning holes

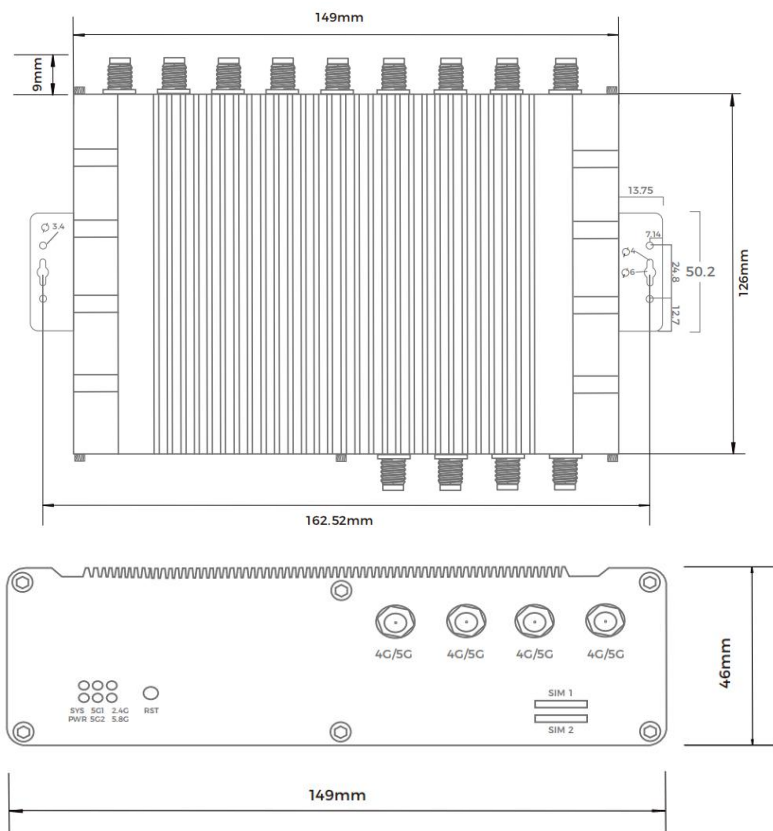

○ Optional frequency bands

4G band

CN: FDD-LTE B1/3/5/8
TDD-LTE B38/39/40/41
EU: FDD-LTE B1/3/5/7/8/20
TDD-LTE B38/39/40/41
AU: FDD-LTE B1/3/5/7/8/20/28
TDD-LTE B38/40/41
NA: FDD-LTE B2/3/4/5/7/8/12/13/17/25/26/66
TDD-LTE B41
SA: FDD-LTE B2/4/5/7/8/28
TDD-LTE B40
J: FDD-LTE B1/3/8/18/19/26
TDD-LTE 41
GL: FDD-LTE B1/2/3/4/5/7/8/17/20/28
TDD-LTE B38/39/40/41

5G band (Optional)

CN: 5G NR NSA: N41/78/79
5G NR SA: N1/8/28/41/78/79
LTE-FDD B1/3/5/8
LTE-TDD: B34/38/39/40/41
EA: 5G
SA&NSA: N1/3/5/7/8/20/28/38/40/41/71/77/78/79
LTE-FDD: B1/3/5/7/8/18/19/20/28/32
LTE-TDD: B34/38/39/40/41/42
GL5G NR SA:
n1/2/3/5/7/8/12/20/25/28/38/40/41/48/66/71/77/78/79
5G NR NSA: n38/41/77/78/79
LTE-FDD:
B1/2/3/4/5/7/8/12/13/14/17/18/19/20/25/26/28/29/30/32/66/71
LTE-TDD: B34/38/39/40/41/42/43/48

○ Standard accessories



Power adapter *1

Optional: British Standard /
European Standard / American
Standard



2 m suction cup antenna -
WiFi



2 m suction cup antenna -4G
(Optional cabinet antenna, rubber stick
antenna, etc.)



Certificate of conformity *1